

## General Description

The Micrel MIC37300/01/02/03 is a 3.0A low-dropout linear voltage regulator that provides a low-voltage, high-current output with a minimum number of external components. It offers high precision, ultra-low-dropout (500mV overtemperature), and low-ground current.

The MIC37300/01/02/03 operates from an input of 2.25V to 6.0V. It is designed to drive digital circuits requiring low-voltage at high currents (i.e., PLDs, DSP, microcontroller, etc.). It is available in fixed and adjustable output voltages. Fixed voltages include 1.5V, 1.8V, 2.5V and 3.3V. The adjustable version is capable of 1.24V to 5.5V.

Features of the MIC37300/01/02/03 LDO include thermal and current-limit protection, and reverse-current protection. Logic enable and error flag pins are available on the 5-pin version.

Junction temperature range of the MIC37300/01/02/03 is from  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .

For applications requiring input voltage greater than 6.0V, see the MIC3910x, MIC3915x, MIC3930x, and MIC3950x LDOs.

Data sheets and support documentation can be found on Micrel's web site at [www.micrel.com](http://www.micrel.com).


## Features

- 3.0A minimum guaranteed output current
- 500mV maximum dropout-voltage overtemperature
  - **Ideal for 3.0V to 2.5V conversion**
  - **Ideal for 2.5V to 1.8V, 1.65V, or 1.5V conversion**
- Stable with ceramic or tantalum capacitor
- Wide input voltage range
  - VIN: 2.25V to 6.0V
- +1.0% initial output tolerance
- Fixed and adjustable output voltages:
  - MIC37300—3-pin fixed voltages
  - MIC37301—5-pin S-Pak or 8-pin e-Pad SOIC fixed voltages with flag
  - MIC37302—5-pin adjustable voltage
  - MIC37303—8-pin e-Pad SOIC adjustable voltage with flag
- Excellent line and load regulation specifications
- Thermal shutdown and current-limit protection
- Reverse-leakage protection
- Low profile S-Pak package


## Applications

- LDO linear regulator for low-voltage digital IC
- PC add-in cards
- High-efficiency linear power supplies
- SMPS post regulator
- Battery charger

## Typical Application

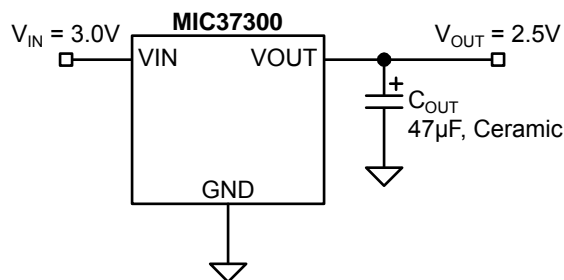



**Fixed 2.5V Regulator**

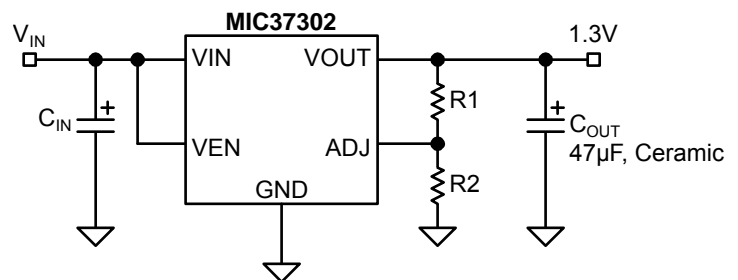

**Adjustable Regulator**

Super Beta PNP is a registered trademarks of Micrel, Inc.

Micrel Inc. • 2180 Fortune Drive • San Jose, CA 95131 • USA • tel +1 (408) 944-0800 • fax + 1 (408) 474-1000 • <http://www.micrel.com>



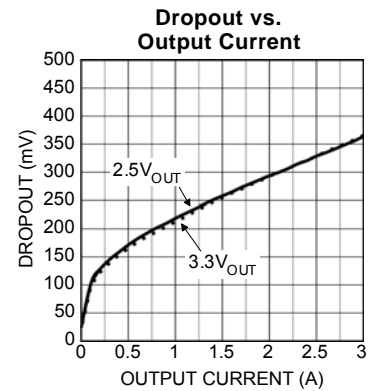
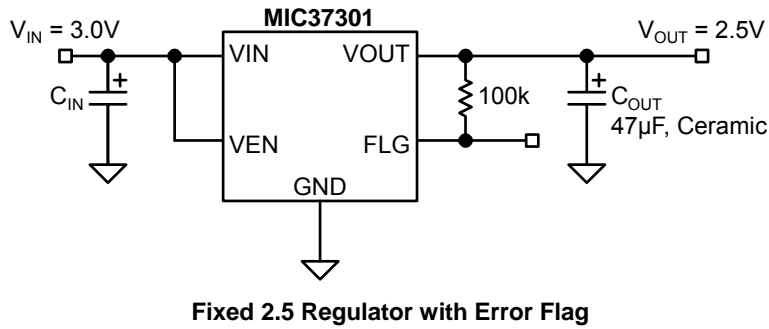


### Ordering Information

| Part number     |                           | Output Current | Voltage | Junction Temp. Range | Package      |
|-----------------|---------------------------|----------------|---------|----------------------|--------------|
| Standard        | RoHS Compliant* / Pb-Free |                |         |                      |              |
| MIC37300-1.5BR  | MIC37300-1.5WR*           | 3.0A           | 1.5V    | -40°C to +125°C      | S-Pak-3      |
| MIC37300-1.65BR | MIC37300-1.65WR*          | 3.0A           | 1.65V   | -40°C to +125°C      | S-Pak-3      |
| MIC37300-1.8BR  | MIC37300-1.8WR*           | 3.0A           | 1.8V    | -40°C to +125°C      | S-Pak-3      |
| MIC37300-2.5BR  | MIC37300-2.5WR*           | 3.0A           | 2.5V    | -40°C to +125°C      | S-Pak-3      |
| MIC37300-3.3BR  | MIC37300-3.3WR*           | 3.0A           | 3.3V    | -40°C to +125°C      | S-Pak-3      |
|                 | MIC37301-1.5YME           | 3.0A           | 1.5V    | -40°C to +125°C      | e-Pad SOIC-8 |
| MIC37301-1.5BR  | MIC37301-1.5WR*           | 3.0A           | 1.5V    | -40°C to +125°C      | S-Pak-5      |
|                 | MIC37301-1.8YME           | 3.0A           | 1.8V    | -40°C to +125°C      | e-Pad SOIC-8 |
| MIC37301-1.8BR  | MIC37301-1.8WR*           | 3.0A           | 1.8V    | -40°C to +125°C      | S-Pak-5      |
|                 | MIC37301-2.5YME           | 3.0A           | 2.5V    | -40°C to +125°C      | e-Pad SOIC-8 |
| MIC37301-2.5BR  | MIC37301-2.5WR*           | 3.0A           | 2.5V    | -40°C to +125°C      | S-Pak-5      |
| MIC37301-3.3BR  | MIC37301-3.3WR*           | 3.0A           | 3.3V    | -40°C to +125°C      | S-Pak-5      |
| MIC37302BR      | MIC37302WR*               | 3.0A           | ADJ     | -40°C to +125°C      | S-Pak-5      |
| MIC37302BU      | MIC37302WU*               | 3.0A           | ADJ     | -40°C to +125°C      | TO-263-5     |
|                 | MIC37303YME               | 3.0A           | ADJ     | -40°C to +125°C      | e-Pad SOIC-8 |

\* RoHS compliant with 'high-melting solder' exemption.

## Pin Configuration

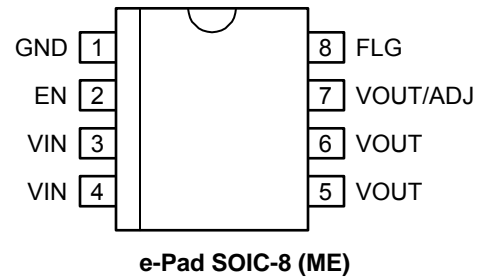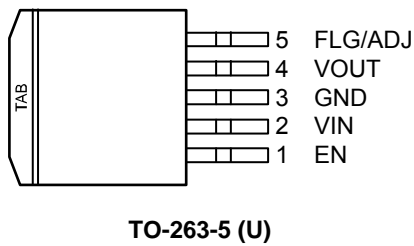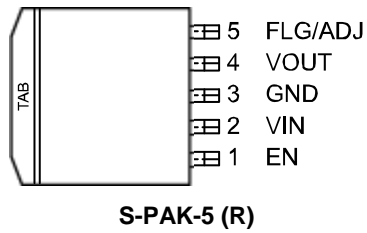

## Pin Description

| Pin Number<br>S-PAK-5<br>TO-263-5 | Pin Number<br>S-PAK-3 | Pin Number<br>e-Pad SOIC-8     | Pin Name | Pin Function  |
|-----------------------------------|-----------------------|--------------------------------|----------|---|
| 1                                 | —                     | 2                              | EN       | Enable Input : CMOS compatible input. Logic high = enable; Logic low = shutdown.            |
| 2                                 | 1                     | 3, 4                           | VIN      | Input voltage which supplies current to the output power device.                            |
| 3                                 | 2                     | 1                              | GND      | Ground: TAB is connected to ground.   |
| 4                                 | 3                     | 5, 6, 7 (Fixed)<br>5, 6 (Adj.) | VOUT     | Regulator Output.   |
| 5 (Fixed)                         | —                     | 8                              | FLG      | Error Flag (Output): Open collector output. Active-low indicates an output fault condition. |
| 5 (Adj.)                          | —                     | 7                              | ADJ      | Adjustable Regulator Feedback Input: Connect to resistor voltage driver.                    |

### Absolute Maximum Ratings<sup>(1)</sup>

|  |  |
|--|--|
| Supply Voltage ( $V_{IN}$ )                      | 6.5V   |
| Enable Input Voltage ( $V_{EN}$ ) <sup>(3)</sup> | 6.5V   |
| Power Dissipation ( $P_D$ ) <sup>(3)</sup>       | Internally Limited                                       |
| Junction Temperature ( $T_J$ )                   | $-40^{\circ}\text{C} \leq T_J \leq +125^{\circ}\text{C}$ |
| Storage Temperature ( $T_S$ )                    | $-65^{\circ}\text{C} \leq T_J \leq +150^{\circ}\text{C}$ |
| Lead Temperature (soldering, 5sec)               | 260°C  |
| ESD Rating <sup>(4)</sup>                        | 2kV  |

### Operating Ratings<sup>(2)</sup>

|                                   |  |
|-----------------------------------|--|
| Supply Voltage ( $V_{IN}$ )       | 2.25V to 6.0V  |
| Enable Input Voltage ( $V_{EN}$ ) | 0V to 6.0V   |
| Junction Temperature ( $T_J$ )    | $-40^{\circ}\text{C} \leq T_J \leq +125^{\circ}\text{C}$ |
| Package Thermal Resistance        |  |
| S-Pak ( $\theta_{JC}$ )           | 2°C/W  |
| TO-263-5 ( $\theta_{JC}$ )        | 2°C/W  |
| e-Pad SOIC-8 ( $\theta_{JC}$ )    | 10°C/W   |

### Electrical Characteristics<sup>(5)</sup>













$T_A = 25^{\circ}\text{C}$  with  $V_{IN} = V_{OUT} + 1\text{V}$ ;  $V_{EN} = V_{IN}$ ;  $I_L = 10\text{mA}$ ; **bold** values indicate  $-40^{\circ}\text{C} < T_J < +125^{\circ}\text{C}$ , unless noted.

| Parameter   | Conditions  | Min          | Typ   | Max                      | Units         |
|---|---|--------------|-------|--------------------------|---------------|
| Output Voltage Accuracy                           | $I_L = 10\text{mA}$   | -1           |       | +1                       | %             |
|   | $10\text{mA} < I_{OUT} < I_{L(max)}$ , $V_{OUT} + 1 \leq V_{IN} \leq 6\text{V}$ | <b>-2</b>    |       | <b>+2</b>                | %             |
| Output Voltage Line Regulation                    | $V_{IN} = V_{OUT} + 1.0\text{V}$ to $6.0\text{V}$ ; $I_L = 10\text{mA}$         |              | 0.02  | 0.5                      | %             |
| Output Voltage Load Regulation                    | $I_L = 10\text{mA}$ to $3\text{A}$  |              | 0.2   | 1                        | %             |
| $V_{IN} - V_{OUT}$ Dropout Voltage <sup>(6)</sup> | $I_L = 1.5\text{A}$<br>(e-Pad SOIC-8)   |              | 175   | <b>350</b><br><b>400</b> | mV            |
|   | $I_L = 3\text{A}$<br>(e-Pad SOIC-8)   |              | 300   | <b>500</b><br><b>550</b> | mV            |
| Ground Pin Current <sup>(7)</sup>                 | $I_L = 3\text{A}$   |              | 27    | 40                       | mA            |
|   |   |              |       | <b>50</b>                | mA            |
| Ground Pin Current in Shutdown                    | $V_{IL} \leq 0.5\text{V}$ , $V_{IN} = V_{OUT} + 1\text{V}$                      |              | 1.0   | 5                        | $\mu\text{A}$ |
| Current Limit                                     | $V_{OUT} = 0\text{V}$   |              | 4.75  | <b>6.5</b>               | A             |
| Start-up Time                                     | $V_{EN} = V_{IN}$ , $I_{OUT} = 10\text{mA}$ , $C_{OUT} = 47\mu\text{F}$         |              | 170   | 500                      | $\mu\text{s}$ |
| <b>Enable Input</b>                               |   |              |       |                          |               |
| Enable Input Threshold                            | Regulator enable  | <b>2.25</b>  |       |                          | V             |
|   | Regulator shutdown  |              |       | <b>0.8</b>               | V             |
| Enable pin Input Current                          | $V_{IL} \leq 0.8\text{V}$ (Regulator shutdown)                                  |              |       | 2                        | $\mu\text{A}$ |
|   | $V_{IH} \geq 2.25\text{V}$ (Regulator enable)                                   | 1            | 15    | 30                       | $\mu\text{A}$ |
|   |   |              |       | <b>75</b>                | $\mu\text{A}$ |
| <b>Flag Output</b>                                |   |              |       |                          |               |
| $I_{FLG(LEAK)}$                                   | $V_{OH} = 6\text{V}$  |              |       | 1                        | $\mu\text{A}$ |
|   |   |              |       | <b>2</b>                 | $\mu\text{A}$ |
| $V_{FLG(LO)}$                                     | $V_{IN} = 2.25\text{V}$ , $I_{OL} = 250\mu\text{A}$ <sup>(8)</sup>              |              | 210   | 400                      | mV            |
|   |   |              |       | <b>500</b>               | mV            |
| $V_{FLG}$   | Low Threshold, % of $V_{OUT}$ below nominal                                     | 93           |       |                          | %             |
|   | Hysteresis  |              | 2     |                          | %             |
|   | High Threshold, % of $V_{OUT}$ below nominal                                    |              |       | 99.2                     | %             |
| <b>MIC37302 Only</b>                              |   |              |       |                          |               |
| Reference Voltage                                 |   | 1.228        | 1.240 | 1.252                    | V             |
|   |   | <b>1.215</b> |       | <b>1.265</b>             | V             |
| Adjust Pin Bias Current                           |   |              | 40    | 80                       | nA            |
|   |   |              |       | <b>120</b>               | nA            |

**Notes:**


1. Exceeding the absolute maximum rating may damage the device.
2. The device is not guaranteed to function outside its operating rating.
3.  $P_{D(max)} = (T_{J(max)} - T_A) / \theta_{JA}$ , where  $\theta_{JA}$ , depends upon the printed circuit layout. See "Applicatins Information."
4. Devices are ESD sensitive. Handling precautions recommended.
5. Specification for packaged product only.
6.  $V_{DO} = V_{IN} - V_{OUT}$  when  $V_{OUT}$  decreases to 98% of its nominal output voltage with  $V_{IN} = V_{OUT} + 1V$ . For output voltages below 1.75, dropout voltage specification does not apply due to a minimum input operating voltage of 2.25V.
7.  $I_{GND}$  is the quiescent current.  $I_{IN} = I_{GND} + I_{OUT}$ .
8. For a 2.5V device,  $V_{IN} = 2.250V$  (device is in dropout).

# Typical Characteristics

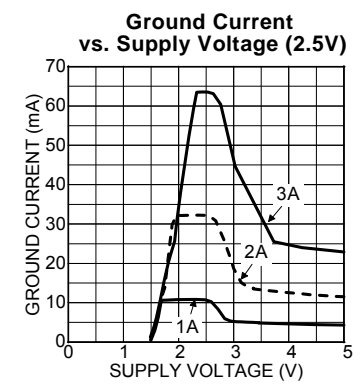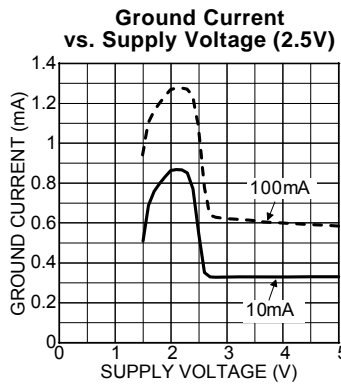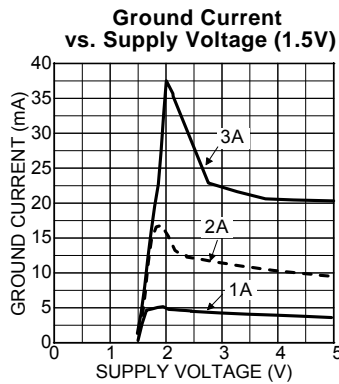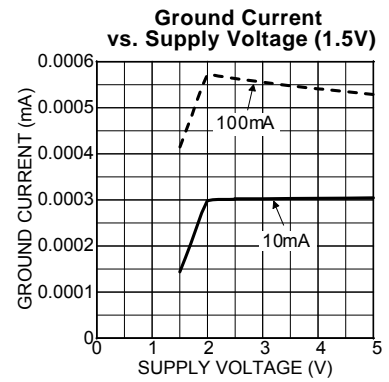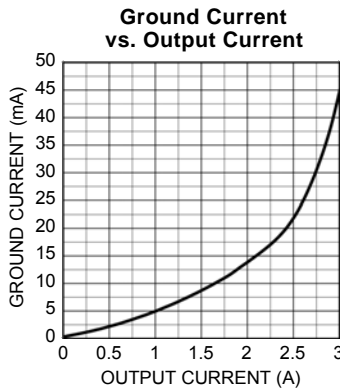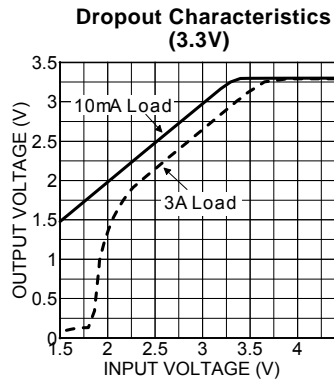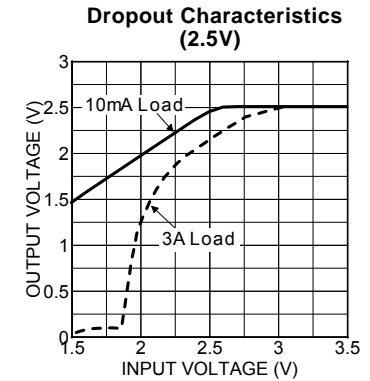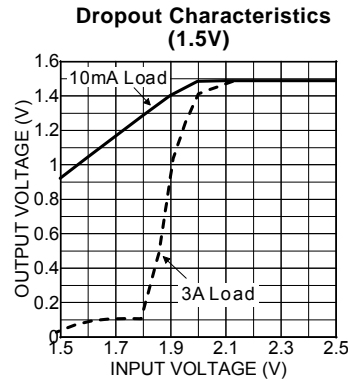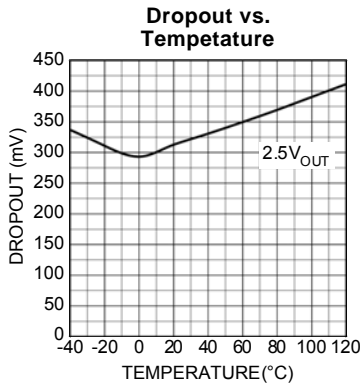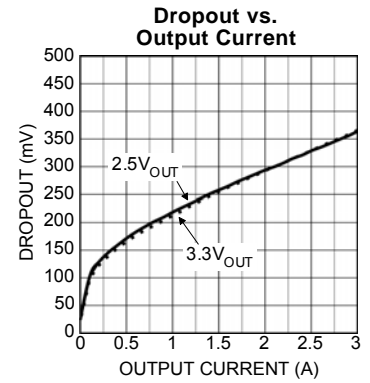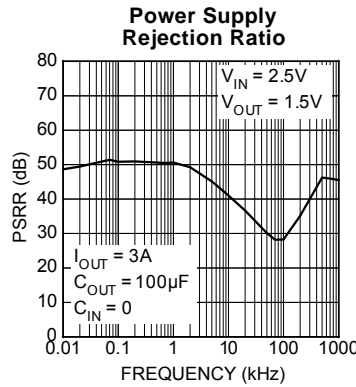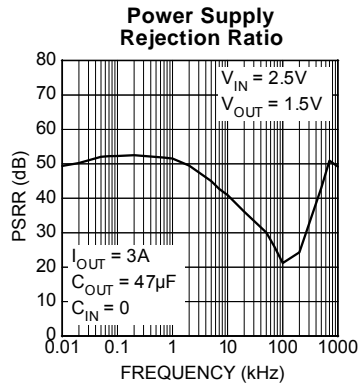


Typical Characteristics (continued)


Ground Current vs. Supply Voltage (3.3V)




Ground Current vs. Supply Voltage (3.3V)




Ground Current vs. Temperature

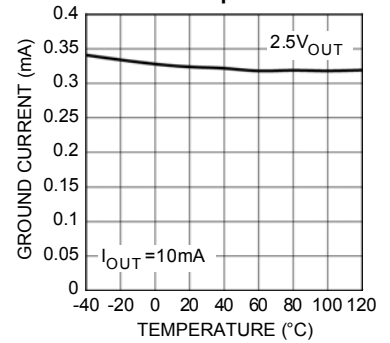


Ground Current vs. Temperature

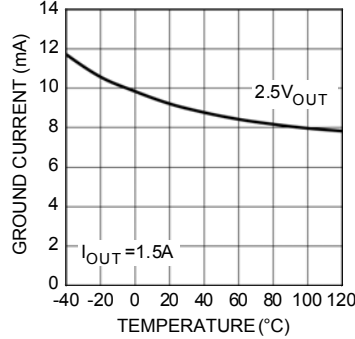


Ground Current vs. Temperature

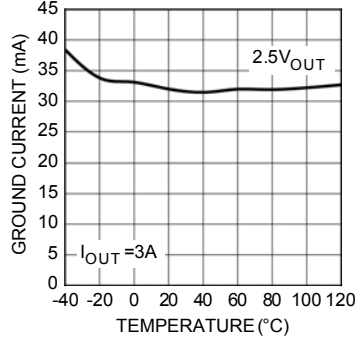


Output Voltage vs. Temperature

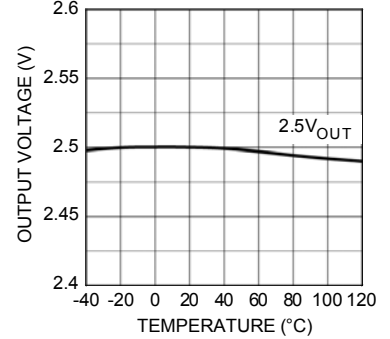


Short-Circuit Current vs. Supply Voltage




Short-Circuit Current vs. Temperature

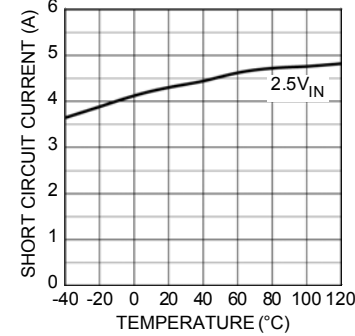


Flag Voltage vs. Flag Current

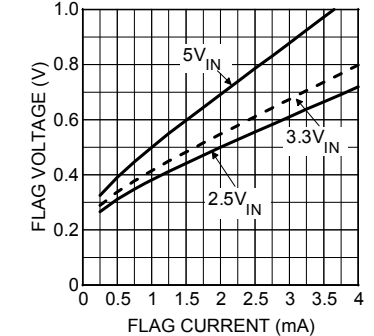


Flag Low Voltage vs. Temperature

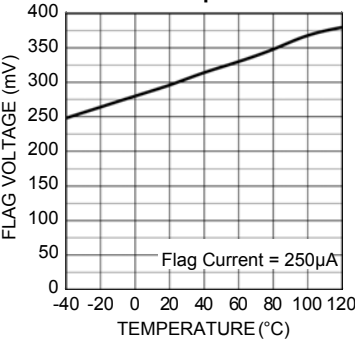




Error Flag Pull-Up Resistor

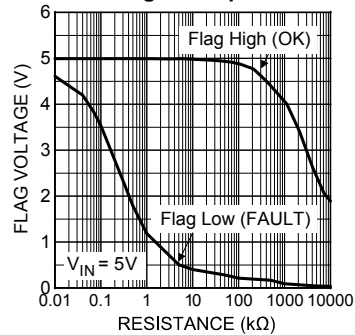

Enable Current vs. Temperature

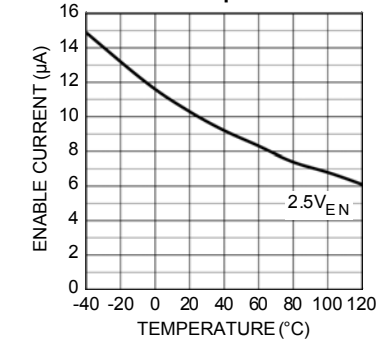

## Functional Characteristics

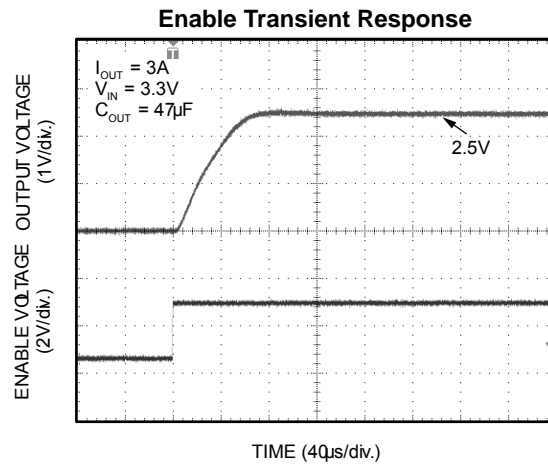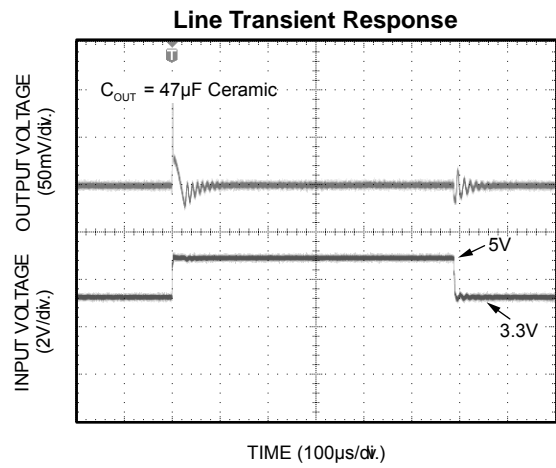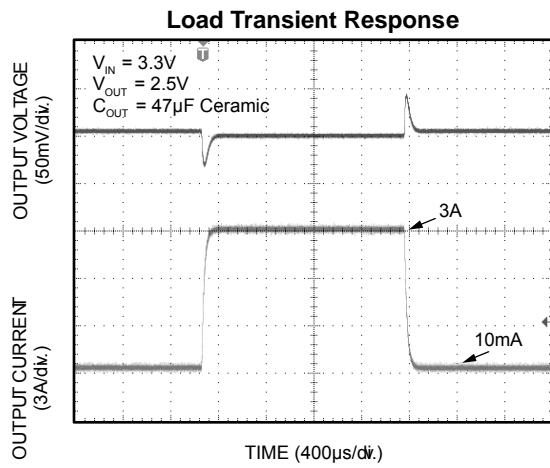



## Applications Information

### Enable/Shutdown

The MIC37300/01/02/03 is a high-performance low-dropout voltage regulator suitable for moderate to high-current regulator applications. Its 500mV dropout voltage at full load and over-temperature makes it especially valuable in battery-powered systems and as high-efficiency noise filters in post-regulator applications. Unlike older NPN-pass transistor designs, there the minimum dropout voltage is limited by the base-to-emitter voltage drop and collector-to-emitter saturation voltage, dropout performance of the PNP output of these devices is limited only by the low VCE saturation voltage.

A trade-off for the low dropout voltage is a varying base drive requirement. Micrel's Super  $\beta$  PNP® process reduces this drive requirement to only 2% to 5% of the load current.

The MIC37300/01/02/03 regulator is fully protected from damage due to fault conditions. Current limiting is provided. This limiting is linear; output current during overload conditions is constant. Thermal shutdown disables the device when the die temperature exceeds the maximum safe operating temperature. The output structure of these regulators allows voltages in excess of the desired output voltage to be applied without reverse current flow.

### Thermal Design

Linear regulators are simple to use. The most complicated design parameters to consider are thermal characteristics. Thermal design requires the following application-specific parameters:

- Maximum ambient temperature ( $T_A$ )
- Output current ( $I_{OUT}$ )
- Output voltage ( $V_{OUT}$ )
- Input voltage ( $V_{IN}$ )
- Ground current ( $I_{GND}$ )

First, calculate the power dissipation of the regulator from these numbers and the device parameters from this datasheet.

$$P_D = (V_{IN} - V_{OUT}) I_{OUT} + V_{IN} I_{GND}$$

where the ground current is approximated by using numbers from the "Electrical Characteristics" or "Typical Characteristics." Then the heat sink thermal resistance is determined with this formula:

$$\theta_{SA} = ((T_{J(max)} - T_A) / P_D) - (\theta_{JC} + \theta_{CS})$$

Where  $T_{J(max)} < 125^\circ\text{C}$  and  $\theta_{CS}$  is between  $0^\circ\text{C}$  and  $2^\circ\text{C/W}$ . The heat sink may be significantly reduced in applications where the minimum input voltage is known and is large compared with the dropout voltage. Use a series input resistor to drop excessive voltage and distribute the heat between this resistor and the regulator. The low-dropout properties of Micrel's Super  $\beta$  PNP® regulators allow significant reductions in regulator power dissipation and the associated heat sink without compromising performance. When this technique is employed, a capacitor of at least  $1.0\mu\text{F}$  is needed directly between the input and regulator ground.

Refer to "Application Note 9" for further details and examples on thermal design and heat sink applications.

### Output Capacitor

The MIC37300/01/02/03 requires an output capacitor for stable operation. As a  $\mu\text{Cap}$  LDO, the MIC37300/01/02/03 can operate with ceramic output capacitors as long as the amount of capacitance is  $47\mu\text{F}$  or greater. For values of output capacitance lower than  $47\mu\text{F}$ , the recommended ESR range is  $200\text{m}\Omega$  to  $2\Omega$ . The minimum value of output capacitance recommended for the MIC37300 is  $10\mu\text{F}$ .

For  $47\mu\text{F}$  or greater, the ESR range recommended is less than  $1\Omega$ . Ultra-low ESR, ceramic capacitors are recommended for output capacitance of  $47\mu\text{F}$  or greater to help improve transient response and noise reduction at high frequency. X7R/X5R dielectric-type ceramic capacitors are recommended because of their temperature performance. X7R-type capacitors change capacitance by 15% over their operating temperature range and are the most stable type of ceramic capacitors. Z5U and Y5V dielectric capacitors change value by as much as 50% and 60%, respectively, over their operating temperature ranges. To use a ceramic chip capacitor with Y5V dielectric, the value must be much higher than an X7R ceramic capacitor to ensure the same minimum capacitance over the equivalent operating temperature range.

### Input Capacitor

An input capacitor of  $1.0\mu\text{F}$  or greater is recommended when the device is more than 4 inches away from the bulk supply capacitance, or when the supply is a battery. Small, surface-mount chip capacitors can be used for the bypassing. The capacitor should be placed within 1" of the device for optimal performance. Larger values will help to improve ripple rejection by bypassing the input to the regulator, further improving the integrity of the output voltage.

### Transient Response and 3.3V to 2.5V, 2.5V to 1.8V or 1.65V, or 2.5V to 1.5V Conversions

The MIC37300/01/02/03 has excellent transient response to variations in input voltage and load current. The device has been designed to respond quickly to load current variations and input voltage variations. Large output capacitors are not required to obtain this performance. A standard 47 $\mu$ F output capacitor, preferably tantalum, is all that is required. Larger values help to improve performance even further.

By virtue of its low-dropout voltage, this device does not saturate into dropout as readily as similar NPN-based designs. When converting from 3.3V to 2.5V, 2.5V to 1.8V or 1.65V, or 2.5V to 1.5V, the NPN-based regulators are already operating in dropout, with typical dropout requirements of 1.2V or greater. To convert down to 2.5V without operating in dropout, NPN-based regulators require an input voltage of 3.7V at the very least. The MIC37300/01/02/03 regulator will provide excellent performance with an input as low as 3.0V or 2.25V, respectively. This gives the PNP-based regulators a distinct advantage over older, NPN-based linear regulators.

### Minimum Load Current

The MIC37300/01/02/03 regulator is specified between finite loads. If the output current is too small, leakage currents dominate and the output voltage rises. A 10mA minimum load current is necessary for proper operation.

### Error Flag

The MIC37301 and MIC37303 feature an error flag circuit that monitors the output voltage and signals an error condition when the voltage is 5% below the nominal output voltage. The error flag is an open-collector output that can sink 10mA during a fault condition.

Low output voltage can be caused by a number of problems, including an overcurrent fault (device in current limit) or low input voltage. The flag is inoperative during overtemperature shutdown.

### Enable Input

The MIC37301/02/03 also features an enable input for on/off control of the device. Its shutdown state draws “zero” current (only microamperes of leakage). The enable input is TTL/CMOS compatible for simple logic interface, but can be connected up to  $V_{IN}$ . When enabled, it draws approximately 15 $\mu$ A.

### Adjustable Regulator Design

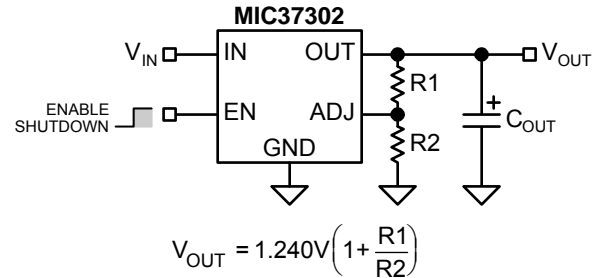



Figure 1. Adjustable Regulator with Resistors

The MIC37302 and MIC37303 allow programming the output voltage any-where between 1.24V and the 5.5V maximum operating rating of the family. Two resistors are used. Resistors can be quite large, up to 1M $\Omega$ , because of the very high input impedance and low bias current of the sense comparator. The resistor values are calculated by:


$$R1 = R2 \left( \frac{V_{OUT}}{1.240} - 1 \right)$$

Where  $V_{OUT}$  is the desired output voltage. Figure 1 shows component definition. Applications with widely varying load currents may scale the resistors to draw the minimum load current required for proper operation (see above).

### Package Information

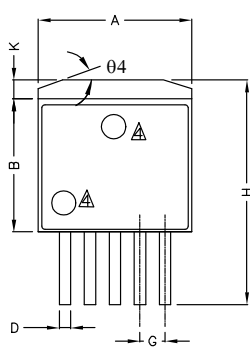


TOP VIEW




SIDE VIEW 1

| PDS     | INCH  |       | MM     |        |
|---------|-------|-------|--------|--------|
|         | MIN   | MAX   | MIN    | MAX    |
| A       | 0.396 | 0.420 | 10.058 | 10.668 |
| B       | 0.330 | 0.361 | 8.382  | 9.169  |
| C       | 0.170 | 0.181 | 4.318  | 4.597  |
| D       | 0.026 | 0.036 | 0.660  | 0.914  |
| E       | 0.045 | 0.055 | 1.143  | 1.397  |
| G       | 0.067 | Ref.  | 1.70   | Ref.   |
| H       | 0.575 | 0.625 | 14.605 | 15.875 |
| K       | 0.045 | 0.066 | 1.143  | 1.676  |
| L       | 0     | 0.012 | 0      | 0.305  |
| M       | 0.080 | 0.120 | 2.032  | 3.048  |
| N       | 0.012 | 0.023 | 0.305  | 0.584  |
| P       | 0.090 | .0110 | 2.286  | 2.794  |
| theta 1 | 3°    | 10°   | 3°     | 10°    |
| theta 2 | 1°    | 7°    | 1°     | 7°     |
| theta 3 | 0°    | 8°    | 0°     | 8°     |
| theta 4 | 18°   | 22°   | 18°    | 22°    |
| U       | 0.300 | Ref.  | 7.620  | Ref.   |
| V       | 0.305 | Ref.  | 7.747  | Ref.   |
| W       | 0.010 | Ref.  | 0.254  | Ref.   |





BOTTOM VIEW



SIDE VIEW 2

NOTE:  
 1. PACKAGE OUTLINE EXCLUSIVE OF MOLD FLASH & METAL BURR.  
 2. PACKAGE OUTLINE INCLUSIVE OF PLATING THICKNESS.  
 3. FOOT LENGTH MEASURED AT INTERCEPT POINT BETWEEN DATUM A & LEAD SURFACE  
 A PACKAGE TOP MARK MAY BE IN TOP CENTER OR LOWER LEFT CORNER


### 5-Pin TO-263-5 (U)

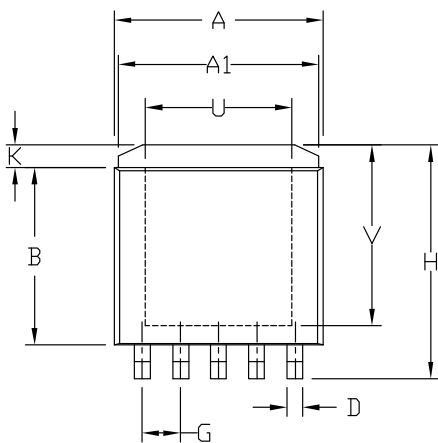


|    | INCHES |       | MILLIMETERS |       |
|----|--------|-------|-------------|-------|
|    |        |       |             |       |
| A  | 0.365  | 0.375 | 9.27        | 9.52  |
| A1 | 0.350  | 0.360 | 8.89        | 9.14  |
| B  | 0.310  | 0.320 | 7.87        | 8.13  |
| C  | 0.070  | 0.080 | 1.78        | 2.03  |
| D  | 0.025  | 0.031 | 0.63        | 0.79  |
| E  | 0.010  | BSC   | 0.25        | BSC   |
| G  | 0.067  | BSC   | 1.70        | BSC   |
| H  | 0.410  | 0.420 | 10.41       | 10.67 |
| K  | 0.030  | 0.050 | 0.76        | 1.27  |
| L  | 0.001  | 0.005 | 0.03        | 0.13  |
| M  | 0.035  | 0.045 | 0.89        | 1.14  |
| N  | 0.010  | BSC   | 0.25        | BSC   |
| P  | 0.031  | 0.041 | 0.79        | 1.04  |
| R  | 0°     | 6°    | 0°          | 6°    |
| U  | 0.256  | BSC   | 6.50        | BSC   |
| V  | 0.316  | BSC   | 8.03        | BSC   |

1. DIMENSION DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS.  
 2. DIMENSION INCLUDES PLATING THICKNESS.

### 5-Pin S-PAK (R)







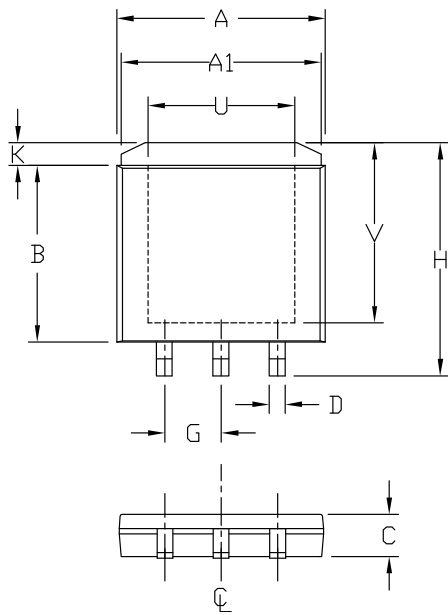

|    | INCHES |       | MILLIMETERS |       |
|----|--------|-------|-------------|-------|
|    |        |       |             |       |
| A  | 0.365  | 0.375 | 9.27        | 9.52  |
| A1 | 0.350  | 0.360 | 8.89        | 9.14  |
| B  | 0.310  | 0.320 | 7.87        | 8.13  |
| C  | 0.070  | 0.080 | 1.78        | 2.03  |
| D  | 0.025  | 0.031 | 0.63        | 0.79  |
| E  | 0.010  | BSC   | 0.25        | BSC   |
| G  | 0.100  | BSC   | 2.54        | BSC   |
| H  | 0.410  | 0.420 | 10.41       | 10.67 |
| K  | 0.030  | 0.050 | 0.76        | 1.27  |
| L  | 0.001  | 0.005 | 0.03        | 0.13  |
| M  | 0.035  | 0.045 | 0.89        | 1.14  |
| N  | 0.010  | BSC   | 0.25        | BSC   |
| P  | 0.031  | 0.041 | 0.79        | 1.04  |
| R  | 0°     | 6°    | 0°          | 6°    |
| U  | 0.256  | BSC   | 6.50        | BSC   |
| V  | 0.316  | BSC   | 8.03        | BSC   |

1. DIMENSION DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
2. DIMENSION INCLUDES PLATING THICKNESS.

**3-Pin S-PAK (R)**

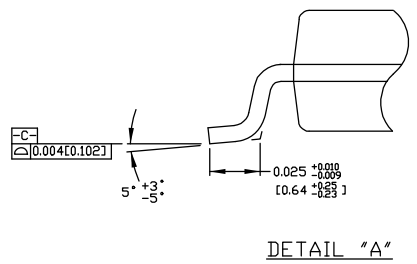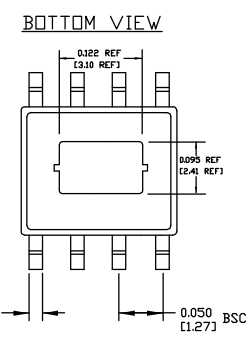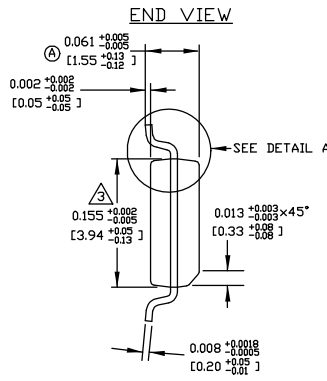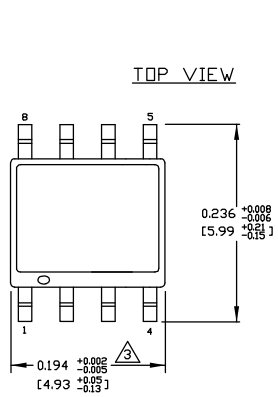

- NOTES:
1. DIMENSIONS ARE IN INCHES[MM].
  2. CONTROLLING DIMENSION: INCHES.
- ③ DIMENSION DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS, EITHER OF WHICH SHALL NOT EXCEED 0.006[0.15] PER SIDE.

**8-Pin SOIC (ME)**

---

**MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA**  
TEL +1 (408) 944-0800 FAX +1 (408) 474-1000 WEB <http://www.micrel.com>

The information furnished by Micrel in this data sheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is a Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2002 Micrel, Inc.