


CTC COIL TECHNOLOGY CORPORATION

DC/DC CONVERTER MSL-XXXX SERIES 2W SINGLE OUTPUT

ELECTRICAL SPECIFICATIONS: UNREGULATED

- Input voltage range ----- $\pm 10\%$
- Input filter----- Capacitor.
- Output voltage accuracy ----- $\pm 5\%$
- Line voltage regulation ----- 1.2%Typ./1%Of Vin
- Load voltage regulation (10% ~ 100%)-
5V Output Types----- 15% Max.
9V,12V and 15V Output Types----- 10% Max.
- Ripple&noise/20MHZ BW ----- 200mV P-P Max.
- Efficiency at full load----- 70% Min.
- Isolation voltage ----- 1000 Vdc/1sec.
- Short circuit protection ----- 1.0 Second
- Operating temperature range ----- -40°C to 85°C
- Storage temperature range ----- -55°C to 125°C
- Isolation resistance ----- 10G Ω
- Isolation capacity ----- 46pF Typ.
- Package weight----- 1.4g

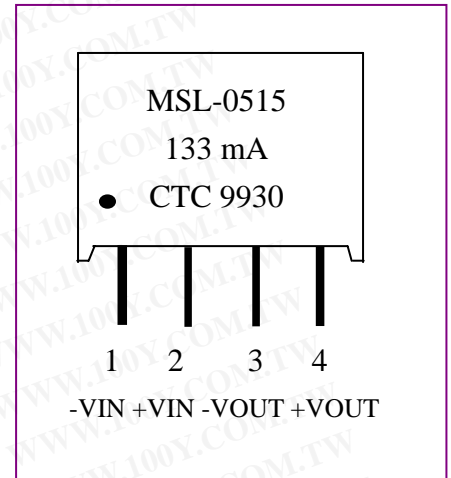


Note: Measured @ 25 With The Condition of Vin = Nominal And Full Load.

Selection Guide

Model Number	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency (%)
MSL-XX3.3	3.3,5,9,12,15,24	3.3	606	70
MSL-XX05	3.3,5,9,12,15,24	5	400	70
MSL-XX09	3.3,5,9,12,15,24	9	222	72
MSL-XX12	3.3,5,9,12,15,24	12	166	75
MSL-XX15	3.3,5,9,12,15,24	15	133	78
MSL-XX24	3.3,5,9,12,15,24	24	83	80

Package Style And Pinning (mm)

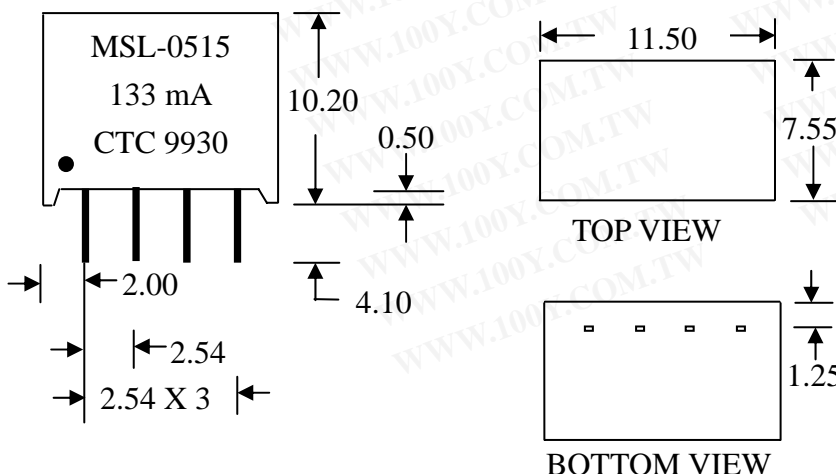

PIN	FUNCTION
1	-VIN
2	+VIN
3	-VOUT
4	+VOUT

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

*Note : Terminal ----- 0.51 X 0.2 Flat Pin

TOL. : $\pm 0.25\text{mm}$
UNIT : mm