



CX82310 Features

- **ADSL Compliance**

- Compliant with ADSL standards
 - Full-rate ANSI T1.413 Issue 2 and ITU G.dmt (G.992.1) standards
 - Splitterless ITU G.lite (G.992.2) specification
 - Annex A (ADSL over POTS) and Annex B (ADSL over ISDN)
- DMT modulation and demodulation
- Full-rate adaptive modem
 - Maximum downstream rate of 8 Mbps
 - Maximum upstream rate of 1 Mbps
- Tone detection for low power mode
- Supports splitterless ADSL implementation
- Supports Dying Gasp
- Interoperable with all major DSLAM equipment

- **ATM Protocols**

- WAN mode support: PPP over ATM (RFC 2364) and PPP over Ethernet (RFC 2516)
- LAN mode support: bridged/routed Ethernet over ATM (RFC 1483) and classical IP over ATM (RFC 1577)
- ATM Forum UNI 3.1/4.0 PVC
- Up to 8 VCs (virtual circuits)
- ATM SAR (segmentation and reassembly)
- ATM AAL5 (adaption layer type 5)
- OAM F4/F5

- **Bridge Mode**

- Ethernet to ADSL self learning Transparent Bridging (IEEE 802.1D)
- Supports up to 128 MAC learning addresses

- **Router Mode**

- IP routing-RIPv2
- Static routing
- DNS Proxy
- Port Forwarding
- DHCP (dynamic host configuration protocol) server and client

- NAT (network address translation)
- NAPT (network address and port translation)
- ICMP (Internet control message protocol)
- Simultaneous USB and Ethernet operation

- **Security**

- 802.1x Access Control
- WEP Encryption capable
- User authentication for PPP
- PAP (password authentication protocol)
- CHAP (challenge authentication protocol)
- Password protected system management

- **Ethernet Interface**

- IEEE 802.3 compliant
- 10/100 Mbps
- Media Independent Interface (MII)

- **USB Interface**


- Compliant with USB Specification, Revision 1.1
- USB full speed (12 Mbps)
- Vendor-specific descriptors
- Windows and Macintosh OS support

- **Wireless Interface**

- PCMCIA-like interface to 802.11b subsystem

- **HTTP Web-Based Management**

- Firmware upgrade via FTP
- Customizable Web pages
- WAN and LAN side connection statistics
- Configuration of static routes and routing table
- Configuration of NAT/NAPT
- Password protected access
- Selection of bridge or router mode
- PPP user ID and password
- Configuration of VCs (virtual circuits)

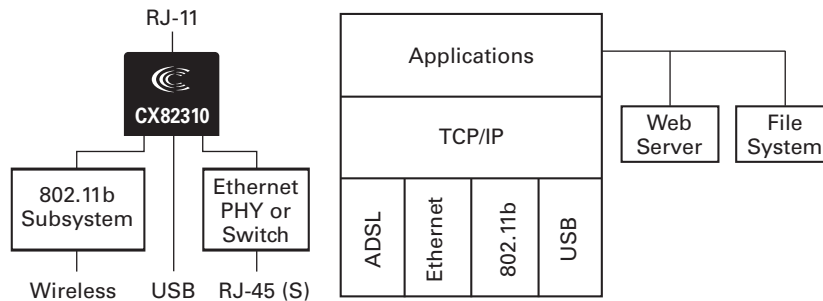

Single-Chip ADSL Router Solution and Embedded Firmware

© 2002, Conexant Systems, Inc. All Rights Reserved. Conexant and the Conexant logo are trademarks of Conexant Systems, Inc. All other trademarks are owned by their respective owners. Although Conexant strives for accuracy in all its publications, this material may contain errors or omissions and is subject to change without notice. **THIS MATERIAL IS PROVIDED AS IS AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.** Conexant shall not be liable for any special, indirect, incidental or consequential damages as a result of its use.

www.conexant.com
 General Information:
 U.S. and Canada: (800) 854-8099
 International: (949) 483-6996
 Headquarters – Newport Beach
 4311 Jamboree Rd, P.O. Box C
 Newport Beach, CA 92660-3095

Order# 101724B

