
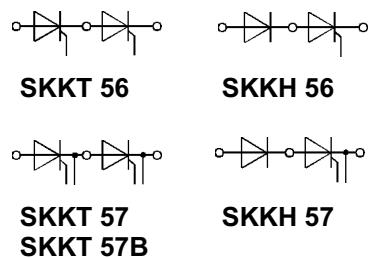


V _{RSM} V _{DRM}	V _{RRM} V _{DRM}	(dv/ dt) _{cr} V/μs	I _{TRMS} (maximum value for continuous operation)			
			95 A			
			I _{TAV} (sin. 180; T _{case} = 74°C)			
			60 A			
500	400	500	—	—	SKKH 56/04 D	—
700	600	500	SKKT 56/06 D	SKKT 57/06 D	SKKH 56/06 D	SKKH 57/06 D
900	800	500	SKKT 56/08 D	SKKT 57/08 D ¹⁾	SKKH 56/08 D	SKKH 57/08 D
1300	1200	1000	SKKT 56/12 E	SKKT 57/12 E ¹⁾	SKKH 56/12 E	SKKH 57/12 E
1500	1400	1000	SKKT 56/14 E	SKKT 57/14 E ¹⁾	SKKH 56/14 E	SKKH 57/14 E
1700	1600	1000	SKKT 56/16 E	SKKT 57/16 E ¹⁾	SKKH 56/16 E	SKKH 57/16 E
1900	1800	1000	SKKT 56/18 E	SKKT 57/18 E ¹⁾	SKKH 56/18 E	SKKH 57/18 E
2100	2000	1000	—	SKKT 57/20 E	—	SKKH 57/20 E
2300	2200	1000	—	SKKT 57/22 E	—	SKKH 57/22 E

SEMIPACK® 1 Thyristor / Diode Modules

SKKT 56 SKKH 56
SKKT 57 SKKH 57
SKKT 57B

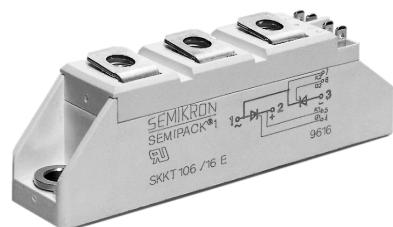

Features

- Heat transfer through aluminium oxide ceramic isolated metal baseplate
- Hard soldered joints for high reliability
- UL recognized, file no. E 63 532

Typical Applications

- DC motor control (e.g. for machine tools)
- AC motor soft starters
- Temperature control (e.g. for ovens, chemical processes)
- Professional light dimming (studios, theaters)

¹⁾ Also available in SKKT 57B configuration (case A 48)

²⁾ See the assembly instructions

³⁾ /20 E, /22 E max. 30 mA

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.

Symbol	Conditions	SKKT 56 SKKH 56	SKKT 57 SKKT 57B	SKKH 57	Units
I _{TAV}	sin. 180; T _{case} = 74 °C T _{case} = 80 °C	60			A
I _D	B2/B6 T _{amb} = 45 °C; P 3/180 T _{amb} = 35 °C; P 3/180 F	57 / 68			A
I _{RMS}	W1/W3 T _{amb} = 35 °C; P 3/180 F	100 / 130			A
I _{TSM}	T _{vj} = 25 °C; 10 ms	130 / 3 x 100			A
i ² t	T _{vj} = 125 °C; 10 ms	1 500			A
	T _{vj} = 25 °C; 8,3 ... 10 ms	1 250			A
	T _{vj} = 125 °C; 8,3 ... 10 ms	11 000			A ² s
		8 000			A ² s
t _{gd}	T _{vj} = 25 °C; I _G = 1 A; di _G /dt = 1 A/μs	1			μs
t _{gr}	V _D = 0,67 · V _{DRM}	2			μs
(di/dt) _{cr}	T _{vj} = 125 °C	150			A/μs
t _q	T _{vj} = 125 °C	typ. 80			μs
I _H	T _{vj} = 25 °C; typ./max.	150 / 250			mA
I _L	T _{vj} = 25 °C; R _G = 33 Ω; typ./max.	300 / 600			mA
V _T	T _{vj} = 25 °C; I _T = 200 A	max. 1,65			V
V _{T(TO)}	T _{vj} = 125 °C	0,9			V
r _T	T _{vj} = 125 °C	3,5			mΩ
I _{DD} ; I _{RD}	T _{vj} = 125 °C; V _{RD} = V _{RRM} V _{DD} = V _{DRM}	max. 15 ³⁾			mA
V _{GT}	T _{vj} = 25 °C; d.c.	3			V
I _{GT}	T _{vj} = 25 °C; d.c.	150			mA
V _{GD}	T _{vj} = 125 °C; d.c.	0,25			V
I _{GD}	T _{vj} = 125 °C; d.c.	6			mA
R _{thjc}	cont. sin. 180 rec. 120 } per thyristor / per module	0,57 / 0,29 0,60 / 0,30 0,64 / 0,32 0,2 / 0,1 – 40 ... + 125 – 40 ... + 125			°C/W
R _{thch}		– 40 ... + 125 – 40 ... + 125			°C/W
T _{vj}					°C
T _{stg}					°C
V _{isol}	a. c. 50 Hz; r.m.s.; 1 s/1 min	3600 / 3000			V~
M ₁	to heatsink } SI (US) units	5 (44 lb. in.) ± 15 % ²⁾			Nm
M ₂	to terminals }	3 (26 lb. in.) ± 15 %			Nm
a		5 · 9,81			m/s ²
w	approx.	95			g
Case	→ page B 1 – 95	SKKT 56: A 5 SKKH 56: A 6	SKKT 57: A 46 SKKT 57B: A 48 SKKH 57: A 47		

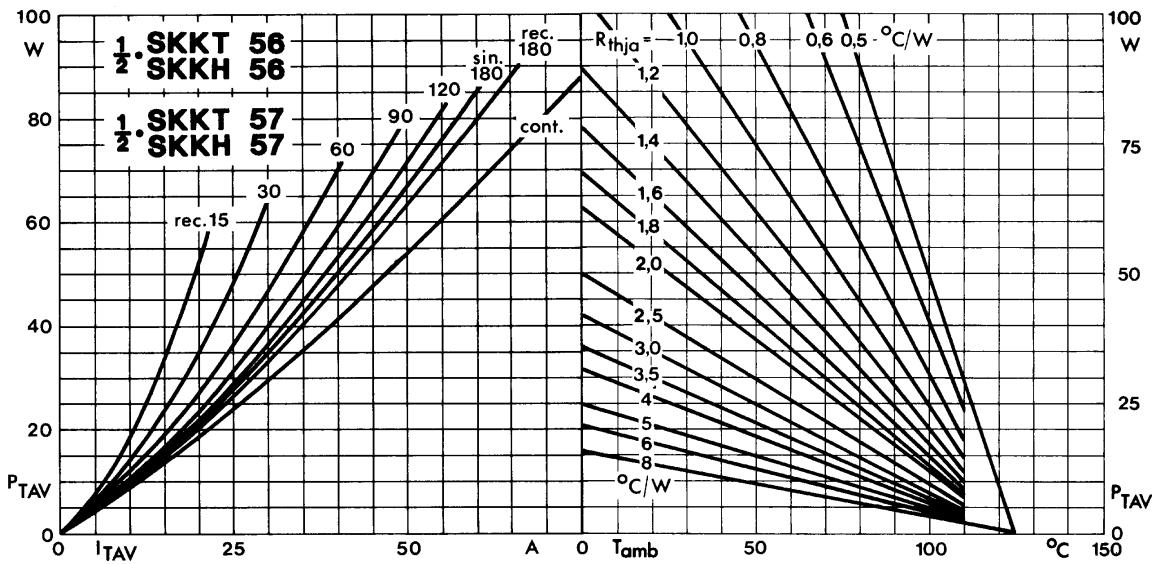


Fig. 1 Power dissipation per thyristor vs. on-state current and ambient temperature

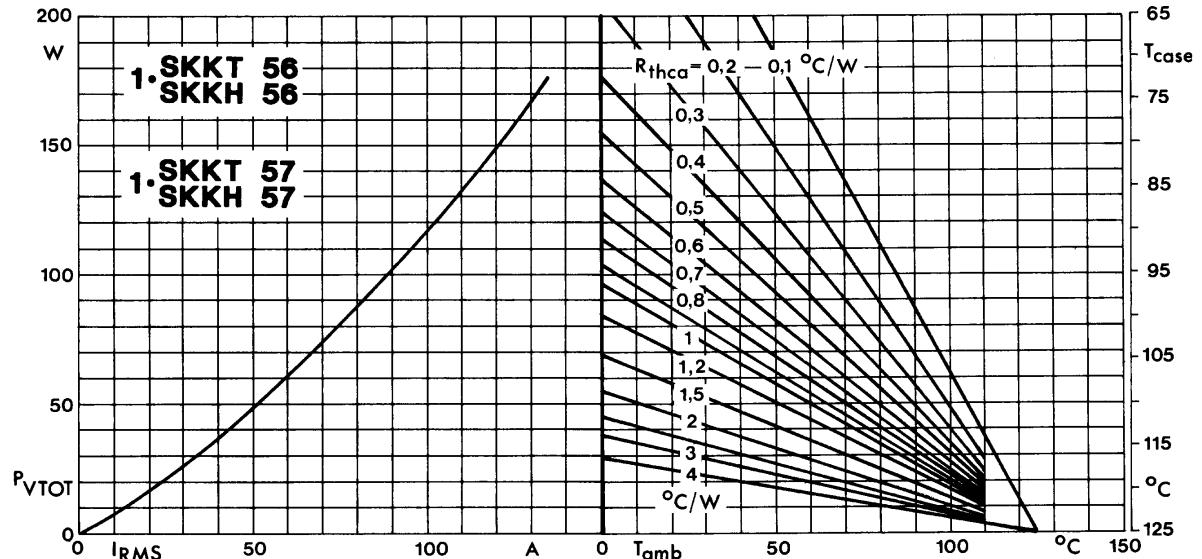


Fig. 2 Power dissipation per module vs. rms current and case temperature

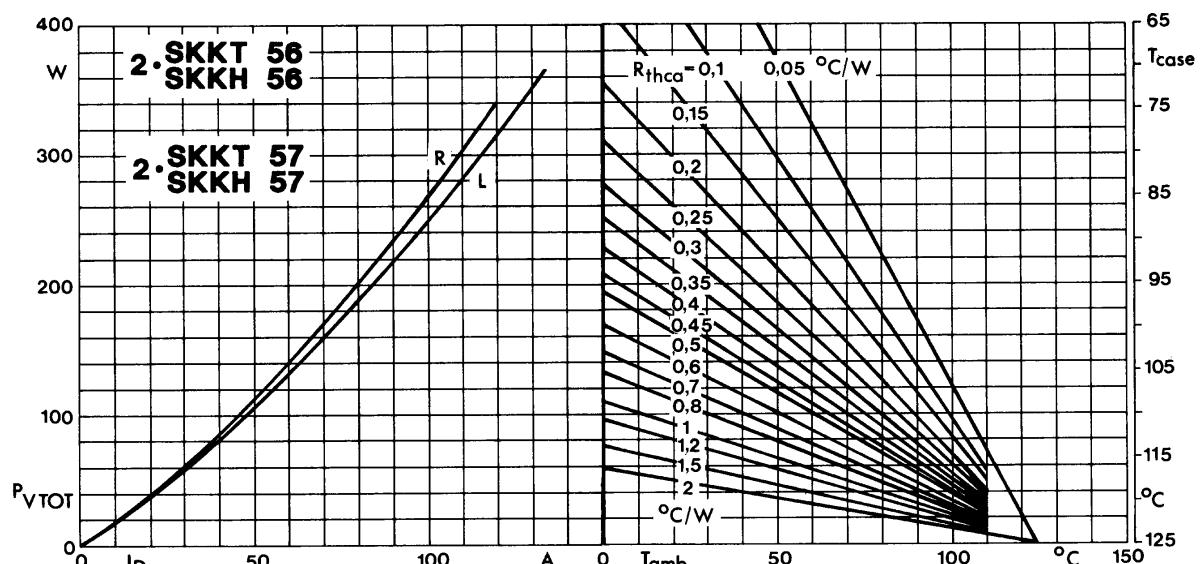


Fig. 3 Power dissipation of two modules vs. direct current and case temperature

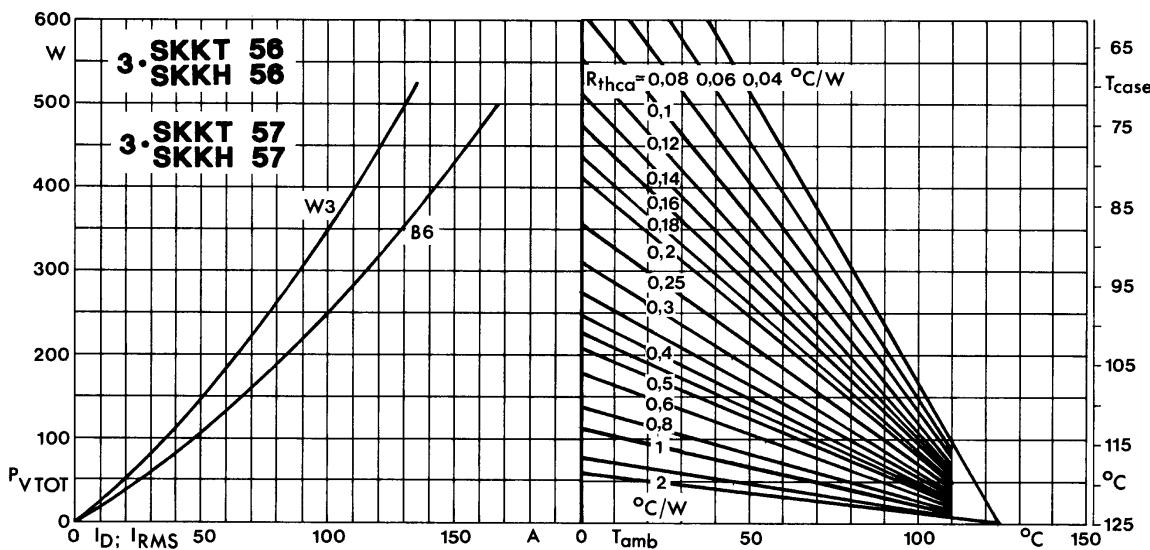


Fig. 4 Power dissipation of three modules vs. direct and rms current and case temperature

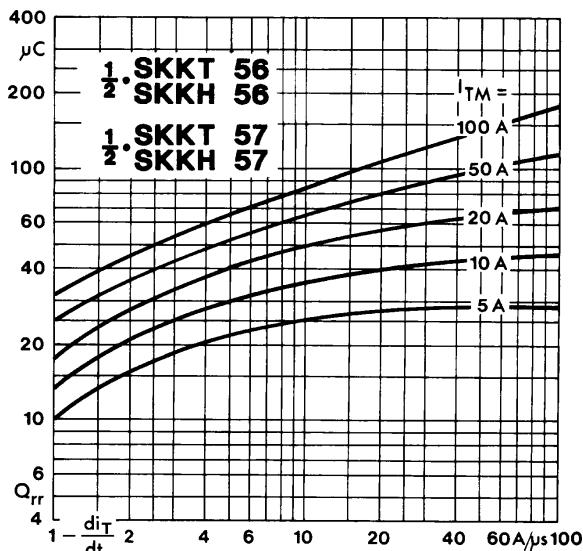


Fig. 5 Recovered charge vs. current decrease

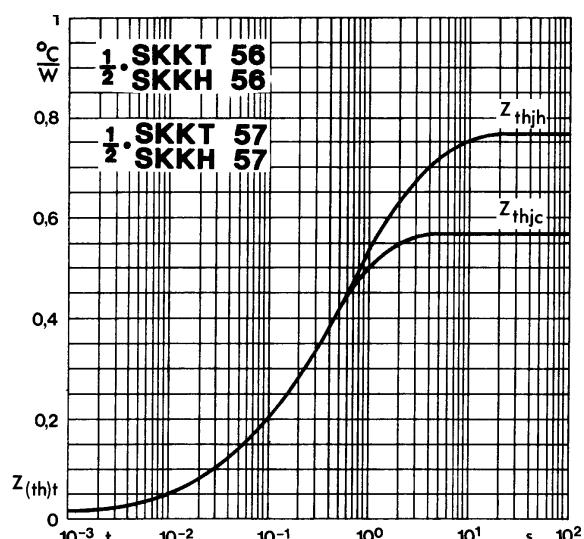


Fig. 6 Transient thermal impedance vs. time

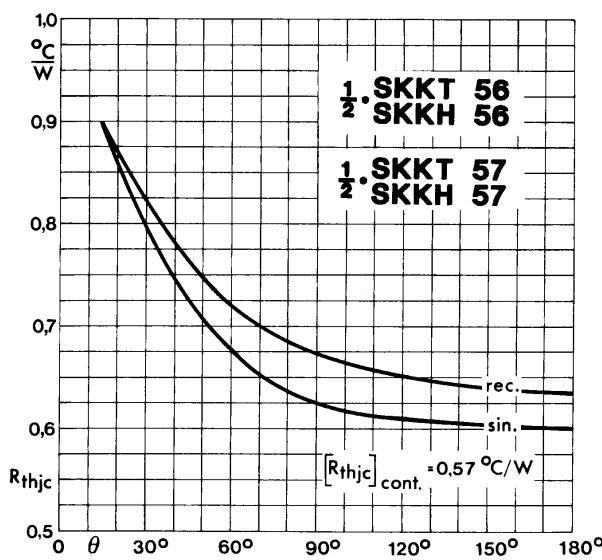


Fig. 7 Thermal resistance vs. conduction angle

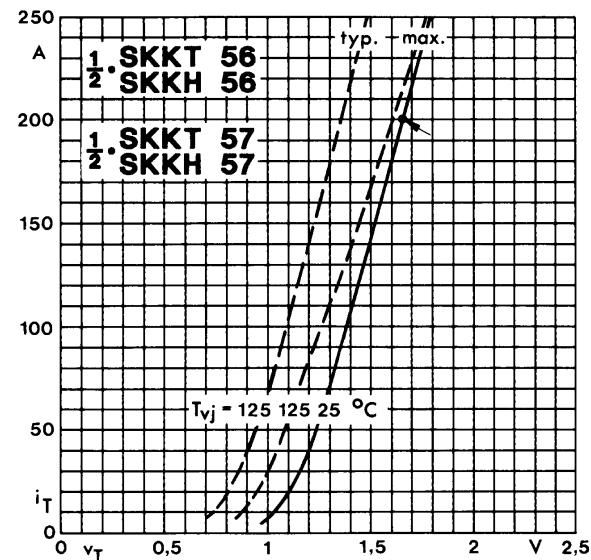


Fig. 8 On-state characteristics

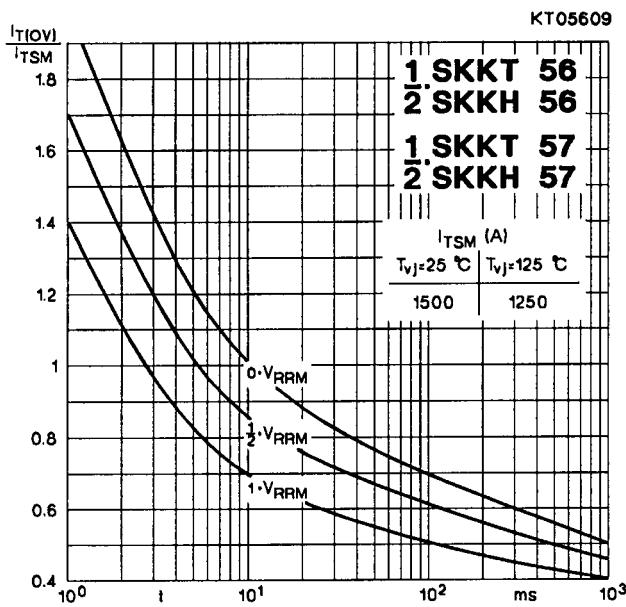


Fig. 9 Surge overload current vs. time

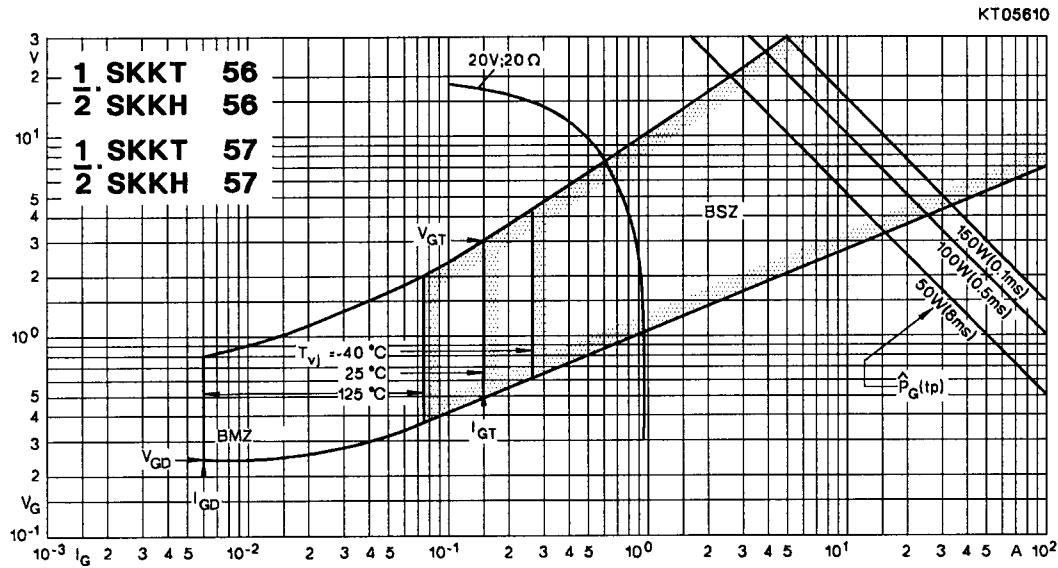
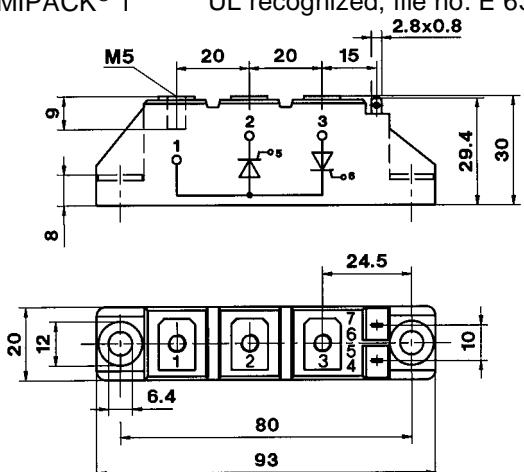
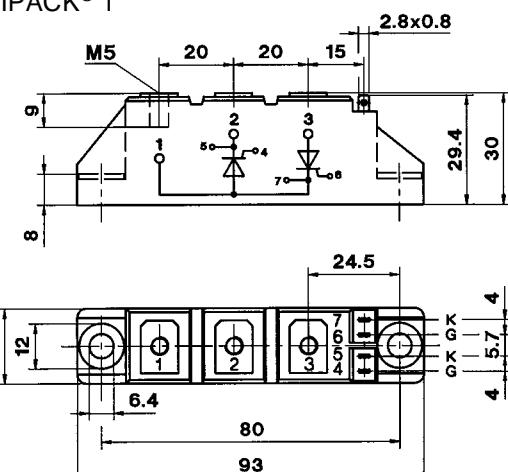
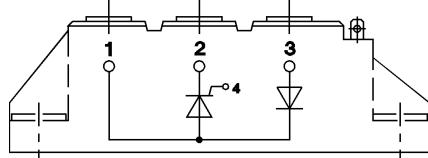
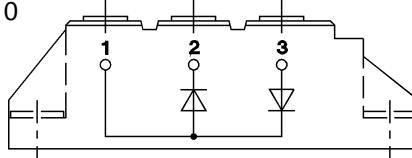
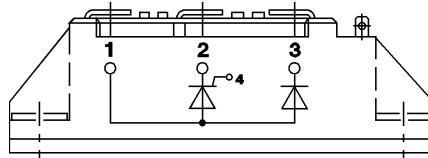
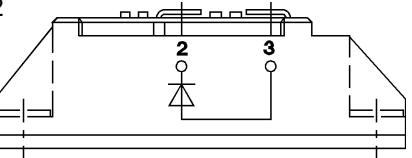
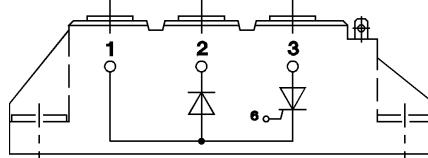
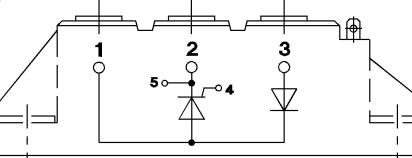
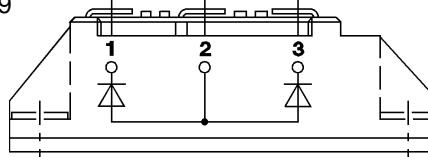
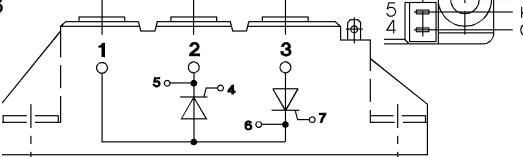
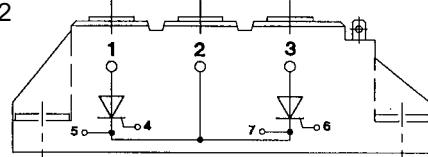


Fig. 10 Gate trigger characteristics

<p>SKKT 19 ... 105 Case A 5 IEC 192-2: A 77 A JEDEC: TO-240 AA SEMIPACK® 1 UL recognized, file no. E 63 532</p>  <p>Dimensions in mm</p>	<p>SKKT 20/ ... 106/ Case A 46 IEC 192-2: A 77 A JEDEC: TO-240 AA SEMIPACK® 1</p>  <p>Dimensions in mm</p>
<p>SKKH 26 ... 105 Case A 6</p> 	<p>SKKD 26 ... 100 Case A 10</p> 
<p>SKNH 56 ... 91 Case A 7</p> 	<p>SKKE 81 Case A 12</p> 
<p>SKKL 56 ... 105 Case A 9</p> 	<p>SKKH 27 ... 106 Case A 47</p> 
<p>SKND 46 ... 81 Case A 19</p> 	<p>SKKT 20 B ... 106 B Case A 48</p> 
<p>SKMT 92 Case A 72</p> 	<p>SKKL 42 ... 106 Case A 59</p> 